


Joint de dilatation de sol sismique

Seismic floor expansion joint


Série JDH 5.190
Series JDH 5.190

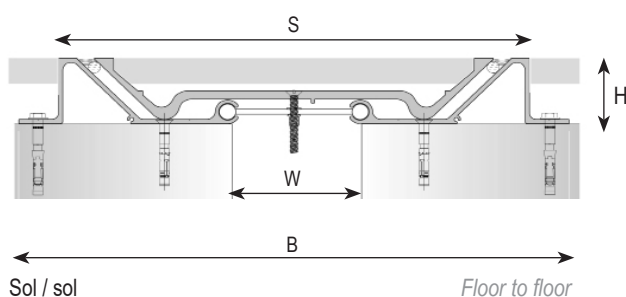

Sol / sol

Floor to floor

Pour joints d'ouvertures 50 à 100 mm - For gaps from 50 to 100 mm

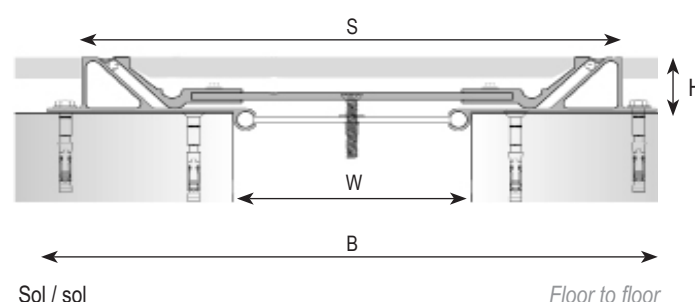

Sol / sol

Floor to floor

Pour joints d'ouvertures ≥ 150 mm - For gaps ≥ 150 mm

Réf. JDH 5.190	5.190-50	5.190-80	5.190-100	5.190-150	5.190-200	5.190-250	5.190-300	5.190-350	5.190-400
W [mm] ouverture / Gap up to	50	80	100	150	200	250	300	350	400
H [mm] hauteur / Depth	51					64			
S [mm] approx.	348			406	456	592	726	776	826
B [mm] approx.	407			465	515	643	776	826	876
Mouvement sismique [mm] Seismic movement [mm]	+25 / -25	+40 / -40	+50 / -50	+75 / -75	+100 / -100	+125 / -125	+150 / -150	+175 / -175	+200 / -200
Matériau / Material	Aluminium								
Longueur standard [ml] Standard length [lm]	3								
Charge [kN] Load-bearing capacity [kN]	 								

Option : Fourniture du fond de joint et du mastic de finition latéral. Selon le revêtement de sol utilisé différents coloris de mastic sont disponibles.